


Drylight

SUSPENSION
APPLIQUE
TABLE LAMP
FLOOR LAMP

Polycarbonate structure with polycarbonate pendants or cut crystal (recommended for indoor use). LED lighting. IP66

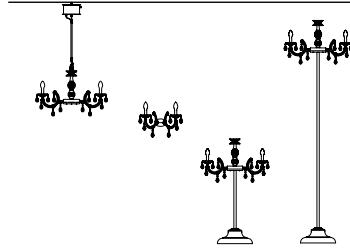

FINISHINGS

STANDARD



E71 Silver Chrome



E95 Pure White



E99 Desert Gold

MATERIALS

STANDARD



EXTREME PENDANTS
Polycarbonate pendants and prisms



PREMIUM PENDANTS
Cut crystal pendants and octagons.
(Recommended for internal use only).


LIGHTING

1. Drylight Led White

2. Drylight Led RGB-W: Drylight incorporates a LED RGB-W system engineered to meet the needs for reliability and strength. It is equipped with a patented system that allows to create endless combinations of light intensity and colour.



STANDARD ROD FOR ALL SUSPENSIONS



H 45 CM / 17.70"


RGB-W CONTROL

The control unit* in the RGB-W Control system allows all functions to be managed according to the user's needs. Each Drylight RGB-W device can be integrated into any home automation system managed with the DMX protocol.

On request, the device can be provided with one of the following control systems:


1. **Radio control:** each individual device can be controlled via a radio remote control. On request, a single remote control can manage several different devices.
2. **App on your smartphone or tablet:** Masiero has developed an App for IOS and Android systems with a simple, intuitive interface to allow an infinite number of devices to be controlled together or individually.

* Control unit not included

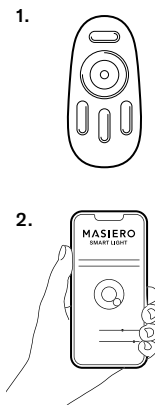

MASIERO SMART LIGHT APP

With the Masiero Smart Light App, an infinite number of appliances can be controlled through the host-slave system.

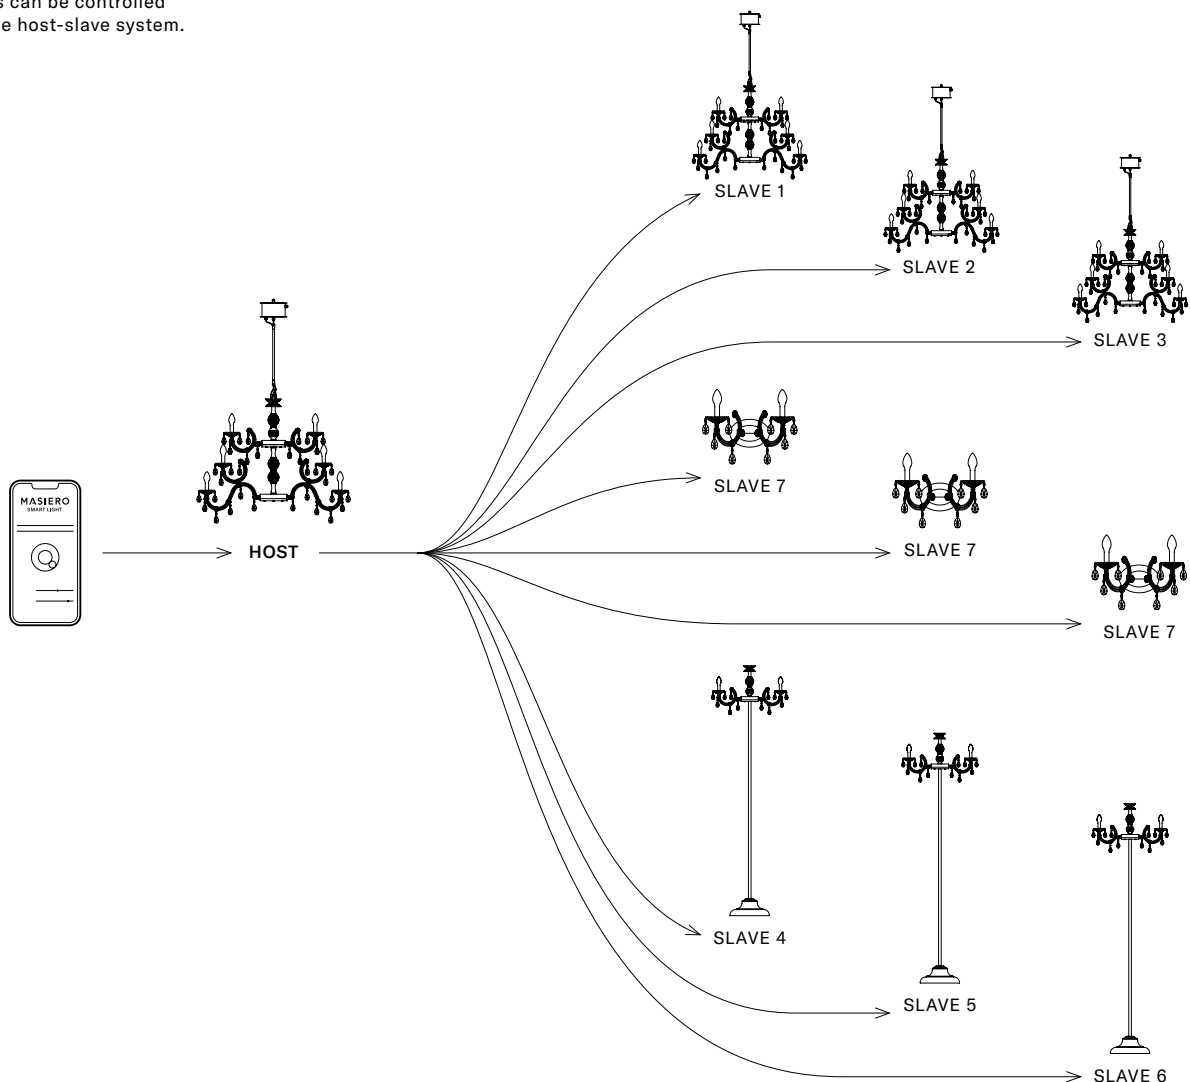

© : for the US market, refer to the relevant price list.

DRYLIGHT S6 WHITE CE  IP66


ø 75 cm / 29.50"
 H 125 cm / 49.20"
 W 7,3 kg / 16,09 lb EXTREME
 8,7 kg / 19,18 lb PREMIUM

H ROD 45 45 cm / 17.70" STANDARD
 H ROD 35 35 cm / 13.80" ON REQUEST
 H ROD 25 25 cm / 9.80" ON REQUEST

INTEGRATED LED LIGHTING

USA 6XWHITE LED SOURCE – 3000 K
 13 W TOT – 1600 NOMINAL LM
 (DRIVER INCLUDED)

DIMM 1-10V + PUSH



DRYLIGHT S12 WHITE CE  IP66


ø 113 cm / 44.50"
 H 135 cm / 53.10"
 W 10,6 kg / 23,36 lb EXTREME
 13,4 kg / 29,54 lb PREMIUM

H ROD 45 45 cm / 17.70" STANDARD
 H ROD 35 35 cm / 13.80" ON REQUEST
 H ROD 25 25 cm / 9.80" ON REQUEST

INTEGRATED LED LIGHTING

USA 12XWHITE LED SOURCE – 3000 K
 26 W TOT – 3360 NOMINAL LM
 (DRIVER INCLUDED)

DIMM 1-10V + PUSH



DRYLIGHT S18 WHITE CE  IP66

ø 113 cm / 44.50"
 H 150 cm / 59.10"
 W 16,1 kg / 35,49 lb EXTREME
 20,2 kg / 44,53 lb PREMIUM

H ROD 45 45 cm / 17.70" STANDARD
 H ROD 35 35 cm / 13.80" ON REQUEST
 H ROD 25 25 cm / 9.80" ON REQUEST


BOX

øb 20 cm / 7.87"
 Hb 10 cm / 3.94"

INTEGRATED LED LIGHTING

USA 18XWHITE LED SOURCE – 3000 K
 39 W TOT – 5040 NOMINAL LM
 (DRIVER INCLUDED)

DIMM 1-10V + PUSH

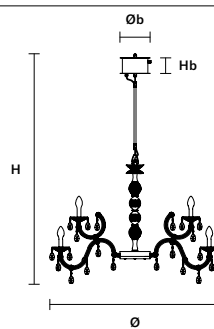

DRYLIGHT S24 WHITE CE  IP66

ø 113 cm / 44.50"
 H 165 cm / 65.00"
 W 23,5 kg / 51,80 lb EXTREME
 29,7 kg / 65,47 lb PREMIUM

H ROD 45 45 cm / 17.70" STANDARD
 H ROD 35 35 cm / 13.80" ON REQUEST
 H ROD 25 25 cm / 9.80" ON REQUEST


BOX


øb 20 cm / 7.87"
 Hb 10 cm / 3.94"

INTEGRATED LED LIGHTING

USA 24XWHITE LED SOURCE – 3000 K
 52 W TOT – 6720 NOMINAL LM
 (DRIVER INCLUDED)

DIMM 1-10V + PUSH

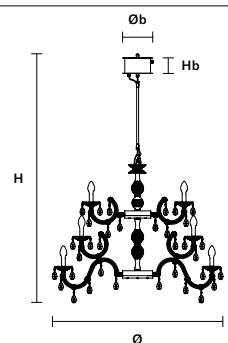

DRYLIGHT S6 RGB-W CE  IP66


ø 75 cm / 29.50"
 H 125 cm / 49.20"
 W 7,3 kg / 16,09 lb EXTREME
 8,7 kg / 19,18 lb PREMIUM

H ROD 45 45 cm / 17.70" STANDARD
 H ROD 35 35 cm / 13.80" ON REQUEST
 H ROD 25 25 cm / 9.80" ON REQUEST

INTEGRATED LED LIGHTING

USA 6XRGB-W LED SOURCE
 24 W TOT (DRIVER INCLUDED)

DIMMABLE



DRYLIGHT S12 RGB-W CE  IP66


ø 113 cm / 44.50"
 H 135 cm / 53.10"
 W 10,6 kg / 23,36 lb EXTREME
 13,4 kg / 29,54 lb PREMIUM

H ROD 45 45 cm / 17.70" STANDARD
 H ROD 35 35 cm / 13.80" ON REQUEST
 H ROD 25 25 cm / 9.80" ON REQUEST

INTEGRATED LED LIGHTING

USA 12XRGB-W LED SOURCE
 48 W TOT (DRIVER INCLUDED)

DIMMABLE



DRYLIGHT S18 RGB-W CE  IP66

ø 113 cm / 44.50"
 H 150 cm / 59.10"
 W 16,1 kg / 35,49 lb EXTREME
 20,2 kg / 44,53 lb PREMIUM

H ROD 45 45 cm / 17.70" STANDARD
 H ROD 35 35 cm / 13.80" ON REQUEST
 H ROD 25 25 cm / 9.80" ON REQUEST


BOX

øb 20 cm / 7.87"
 Hb 14 cm / 5.51"

INTEGRATED LED LIGHTING

USA 18XRGB-W LED SOURCE
 72 W TOT (DRIVER INCLUDED)

DIMMABLE

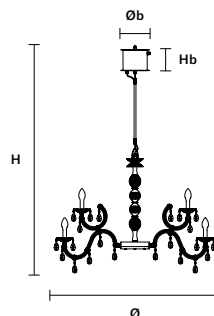

DRYLIGHT S24 RGB-W CE  IP66

ø 113 cm / 44.50"
 H 165 cm / 65.00"
 W 23,5 kg / 51,80 lb EXTREME
 29,7 kg / 65,47 lb PREMIUM

H ROD 45 45 cm / 17.70" STANDARD
 H ROD 35 35 cm / 13.80" ON REQUEST
 H ROD 25 25 cm / 9.80" ON REQUEST


BOX


øb 20 cm / 7.87"
 Hb 14 cm / 5.51"

INTEGRATED LED LIGHTING

USA 24XRGB-W LED SOURCE
 96 W TOT (DRIVER INCLUDED)


DIMMABLE

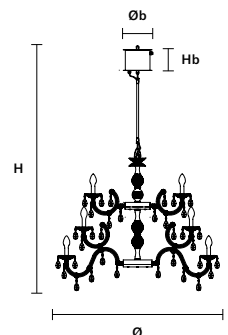

 : for the US market, refer to the relevant price list.


DRYLIGHT A2 WHITE CE IP66


L	44 cm / 17.30"
SP	30 cm / 11.80"
H	37 cm / 14.60"
INTEGRATED LED LIGHTING	
USA	2XWHITE LED SOURCE – 3000 K 5 W TOT – 560 NOMINAL LM (DRIVER INCLUDED)
DIMM	NO

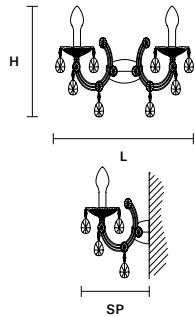

DRYLIGHT A2 RGB-W CE IP66



L	44 cm / 17.30"
SP	30 cm / 11.80"
H	37 cm / 14.60"
FLUSH-MOUNTED BOX (NOT INCLUDED)	
Lb	10 cm / 3.93"
SPb	7 cm / 2.75"
H	10 cm / 3.93"
INTEGRATED LED LIGHTING	
USA	2XRGB-W LED SOURCE 8 W TOT (DRIVER INCLUDED) DIMMABLE

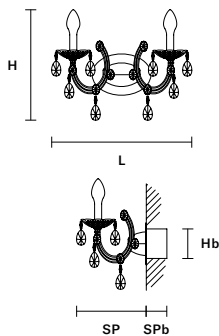

 : for the US market, refer to the relevant price list.



DRYLIGHT TL6 WHITE		CE IP44*
∅	75 cm / 29.50"	
H	120 cm / 47.20"	
INTEGRATED LED LIGHTING		
USA	6xWHITE LED SOURCE – 3000 K 13 W TOT – 1600 NOMINAL LM (DRIVER INCLUDED)	
DIMM	1-10 + PUSH	
BATTERY POWER (OPTIONAL) *		
	10 hours AUTONOMY 5 hours TO RECHARGE	

DRYLIGHT TL6 STAKE WHITE		CE IP44*
∅	75 cm / 29.50"	
H	120 cm / 47.20"	
INTEGRATED LED LIGHTING		
USA	6xWHITE LED SOURCE – 3000 K 13 W TOT – 1600 NOMINAL LM (DRIVER INCLUDED)	
DIMM	1-10 + PUSH	
BATTERY POWER (OPTIONAL) *		
	10 hours AUTONOMY 5 hours TO RECHARGE	

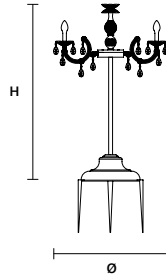

DRYLIGHT TL6 RGB-W		CE IP44*
∅	75 cm / 29.50"	
H	120 cm / 47.20"	
INTEGRATED LED LIGHTING		
USA	6xRGB-W LED SOURCE 24 W TOT (DRIVER INCLUDED)	
	DIMMABLE	
BATTERY POWER (OPTIONAL) *		
	10 hours AUTONOMY 5 hours TO RECHARGE	

DRYLIGHT TL6 STAKE RGB-W		CE IP44*
∅	75 cm / 29.50"	
H	120 cm / 47.20"	
INTEGRATED LED LIGHTING		
USA	6xRGB-W LED SOURCE 24 W TOT (DRIVER INCLUDED)	
	DIMMABLE	
BATTERY POWER (OPTIONAL) *		
	10 hours AUTONOMY 5 hours TO RECHARGE	

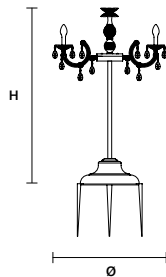



Ⓜ : for the US market, refer to the relevant price list.

* IP66 FOR BATTERY VERSION



DRYLIGHT STL6 WHITE		CE IP44*
Ø	75 cm / 29.50"	
H	245 cm / 96.50"	
INTEGRATED LED LIGHTING		
USA	6xWHITE LED SOURCE – 3000 K 13 W TOT – 1600 NOMINAL LM (DRIVER INCLUDED)	
DIMM	1-10V + PUSH	
BATTERY POWER (OPTIONAL) *		
	10 hours AUTONOMY 5 hours TO RECHARGE	

DRYLIGHT STL6 STAKE WHITE		CE IP44*
Ø	75 cm / 29.50"	
H	245 cm / 96.50"	
INTEGRATED LED LIGHTING		
USA	6xWHITE LED SOURCE – 3000 K 13 W TOT – 1600 NOMINAL LM (DRIVER INCLUDED)	
DIMM	1-10V + PUSH	
BATTERY POWER (OPTIONAL) *		
	10 hours AUTONOMY 5 hours TO RECHARGE	

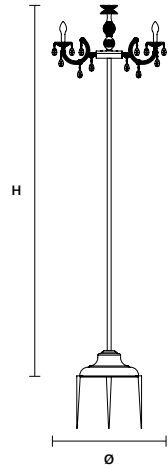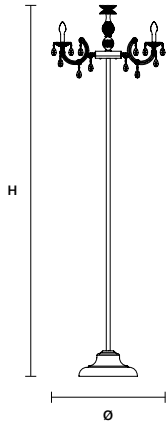

DRYLIGHT STL6 RGB-W		CE IP44*
Ø	75 cm / 29.50"	
H	245 cm / 96.50"	
INTEGRATED LED LIGHTING		
USA	6xRGB-W LED SOURCE 24 W TOT (DRIVER INCLUDED) DIMMABLE	
BATTERY POWER (OPTIONAL) *		
	10 hours AUTONOMY 5 hours TO RECHARGE	

DRYLIGHT STL6 STAKE RGB-W		CE IP44*
Ø	75 cm / 29.50"	
H	245 cm / 96.50"	
INTEGRATED LED LIGHTING		
USA	6xRGB-W LED SOURCE 24 W TOT (DRIVER INCLUDED) DIMMABLE	
BATTERY POWER (OPTIONAL) *		
	10 hours AUTONOMY 5 hours TO RECHARGE	

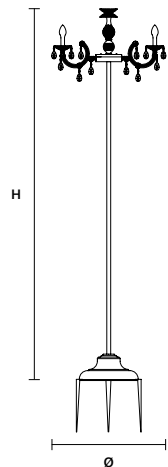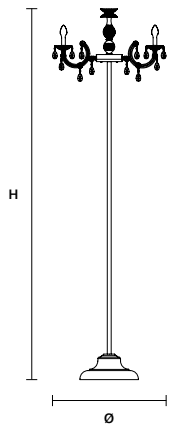

Ⓜ : for the US market, refer to the relevant price list.

* IP66 FOR BATTERY VERSION